




SPS-0108 REV C

AVALON SERIES

JOB NAME: _____ FIXTURE TYPE: _____



BLE - _____ - _____ - _____ - _____ - _____ - _____ - _____ - _____

A B C D E F G

_____ - _____ - _____ - _____ - _____ - _____ - _____ - _____

H I J K L

Order Example: BLE - G - WHA16 - 750 - G13 - NA - 975 - NA - CGG - 750 - FST - NA - E26

A - MOUNTING STYLE

C	Cord Hung
CN	Chain Hung
F	Flush Mount ¹
G	Gooseneck
S	Stem Mount

B - SHADE SIZE**AVALON:**

WHA8	8" Shade ^{1,2}
WHA10	10" Shade ^{1,2}
WHA12	12" Shade
WHA14	14" Shade
WHA16	16" Shade

C - SHADE FINISH**PORCELAIN FINISHES³:**

150	Black
250	White
350	Vintage Green
355	Jadite
455	Cherry Red
550	Yellow
650	Bronze
750	Cobalt Blue
765	Delphite Blue
850	Graphite
950	Metallic Chrome

POWDER COAT FINISHES⁴:

100	Black
105	Textured Black
106	Matte Black
200	White
206	Matte White
300	Dark Green
307	Emerald Green
370	Mint
380	Chartreuse
390	Teal
400	Barn Red
420	Orange
470	Watermelon
480	Blush Pink
490	Magenta
495	Sherbet Orange
500	Buttery Yellow
570	Sunflower
600	Bronze
601	Chocolate
605	Rust
615	Oil-Rubbed Bronze

C - SHADE FINISH (CONTINUED)**POWDER COAT FINISHES⁴:**

700	Royal Blue
705	Navy
790	Lavender
800	Industrial Grey
805	Charcoal Granite
975	Galvanized

NATURAL METALS⁵:

995	Raw Copper
996	Weathered Copper
997	Raw Brass
998	Weathered Brass
999	Oil-Rubbed Copper

D - MOUNTING

Please Note: If Flush Mount [F] is selected in **Section A**, please select **NA**

NA	Not Applicable
-----------	----------------

CSA LISTED CORD OPTIONS:

SBK	Standard Black
SWH	Standard White
CMG	Grey Cotton
CRZ	Red Chevron
CSB	Black Cloth
CSW	White Cloth
CSR	Red Cloth
CSBB	Black & Brown Cloth
CSRW	Red & White Cloth
CSGW	Gold & White Cloth
CSBG	Black & Gold Cloth
CSBW	Black & White Cloth
CSBP	Black & Pink Cloth
CSUW	Blue & White Cloth

NON-CSA LISTED CORD OPTIONS⁶:

TBK	Black Cotton Twist
TWH	White Cotton Twist
TBR	Brown Cotton Twist
TRD	Red Cotton Twist
TPT	Putty Cotton Twist
TBW	Black & White Twist
TRW	Red & White Twist
TBB	Brown & Beige Twist

CHAIN MOUNT OPTIONS^{7,8}:

CN36	3' of Chain
CN48	4' of Chain
CN60	5' of Chain
CN72	6' of Chain

D - MOUNTING (CONTINUED)**GOOSENECK OPTIONS:**

G1⁷	G11⁷	G25⁸
G2^{7,8}	G12⁷	G26⁷
G3^{7,9}	G13⁸	G32⁸
G4^{8,9}	G14⁸	G34^{7,8}
G5⁷	G15⁸	G35⁷
G6⁸	G16⁷	G36^{7,8}
G7⁸	G17⁸	G40^{7,8}
G8⁸	G19^{7,8}	G64^{7,8}
G9⁸	G22⁸	G65^{7,8}
G10⁸	G24⁸	

STEM MOUNT OPTIONS:

ST506	.5" Stem Mount, 6" ⁷
ST512	.5" Stem Mount, 12" ⁷
ST518	.5" Stem Mount, 18" ⁷
ST524	.5" Stem Mount, 24" ⁷
ST536	.5" Stem Mount, 36" ⁷
ST548	.5" Stem Mount, 48" ⁷
ST706	.75" Stem Mount, 6" ⁸
ST712	.75" Stem Mount, 12" ⁸
ST718	.75" Stem Mount, 18" ⁸
ST724	.75" Stem Mount, 24" ⁸
ST736	.75" Stem Mount, 36" ⁸
ST748	.75" Stem Mount, 48" ⁸

E - CORD LENGTH¹⁰

Please Note: If GU24 is selected in **Section L**, max Cord Length is 12FT

NA	Not Applicable
7FT	7' of Cord
12FT	12' of Cord
20FT	20' of Cord

F - MOUNTING FINISH

Please Note: See **Section C** for Finish Options. 980-Brushed Aluminum is also available for Gooseneck (Except G36, G40, G64 & G65) and Stem mounting styles. If Porcelain Finish is selected, mounting will be powder coat painted-to-match.

(I) If Cord Hung [C] or Flush Mount [F]⁷ Mounting Style, selection identifies canopy finish

(II) If Chain Hung [CN]⁷ Mounting Style, selection identifies chain and canopy finish

(III) If Stem Mount [S] Mounting Style, selection identifies stem and canopy finish

980	Brushed Aluminum
------------	------------------

G - CORDS¹¹

Please Note: See **Section D** for all applicable CSA Listed Cord Options for Chain Hung Mounting Style

NA	Not Applicable
-----------	----------------

H - SHADE ACCESSORIES⁷

NA	None
WC	Wire Cage ²
ACR	Acrylic Diffuser ^{2,12,13,14}
TGG	Heavy Duty Guard ¹³
CGG	Cast Guard ¹³
WGG	Wire Guard ¹³

I - SHADE ACCESSORY FINISH

Please Note: See **Section C** for Finish Options. Natural Metals not applicable. If Porcelain Finish is selected, accessory will be powder coat painted-to-match

NA	Not Applicable
-----------	----------------

J - GLASS OPTION^{13,15}

NA	Not Applicable
CLR	Clear Glass
FST	Frosted Glass
RIB	Ribbed Glass

K - MOUNTING ACCESSORY

NA	None/Not Applicable
HSC	Hang Straight Canopy ^{7,16}
HDSMC	Heavy Duty Stem Mount Canopy ^{7,16}
HDBP	Heavy Duty Backing Plate ^{7,17}
DD	Dusk-to-Dawn Photocell ^{17,18}
DBPC	Decorative Backing Plate Cover ^{17,18}
DCHX	Decorative Backing Plate Cover & Hex Cover ^{17,18}


L - LIGHT SOURCE

E26	200 Watt Max
GU24	23 Watt Max ^{1,19}


IMPORTANT: (1) Not available with Acrylic Diffuser accessory (2) Not available with the Guard & Glass Accessory (3) All Porcelain Enamel finished shades feature a white interior and a black outer rim (4) All Powder Coat finished shades, Galvanized excluded, feature a white interior (5) Natural Metals have a longer estimated manufacturing time, please check the website for exact lead time. There are no returns accepted on Natural Metals (6) Not available with Chain Hung option [CN] (7) Not available in Natural Metals (8) Not applicable if WHA8 is selected in Section B (9) Not available with 16" size shade (10) Only applicable if Cord Hung Mounting Style is selected in Section A, select NA if another Mounting Style is selected (11) Only applicable if Chain Hung Mounting Style selected in Section A, select NA if another Mounting Style is selected (12) Acrylic Diffuser accessory reduces incandescent wattage to 60W (13) Not applicable if WHA8 or WHA10 is selected in Section B (14) Fixture is UL Listed for Damp Locations with Acrylic Diffuser (15) Guard and Glass accessory reduces incandescent wattage to 100W Max and GU24 Bi-Pin to 18W Max (16) Only applicable if Stem Mounting Style is selected in Section A (17) Only applicable if Gooseneck Mounting Style is selected in Section A (18) Not available for G19 & G40 (19) Fixtures configured with GU24 socket are non-returnable

MOUNTING STYLE


CHAIN HUNG PENDANT (CN)

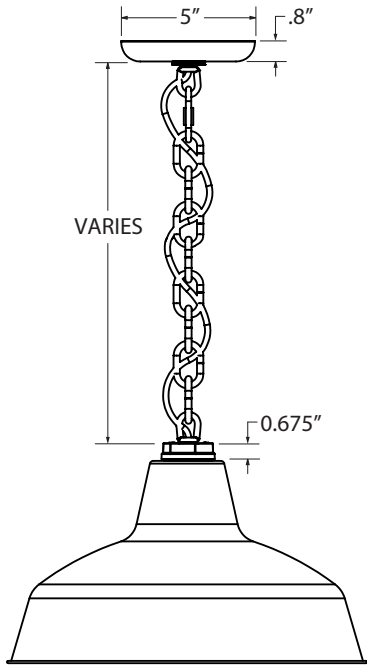


FLUSH MOUNT (F)

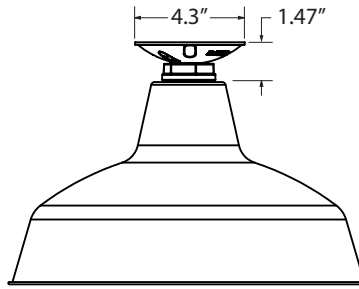


STEM MOUNT PENDANT (S)

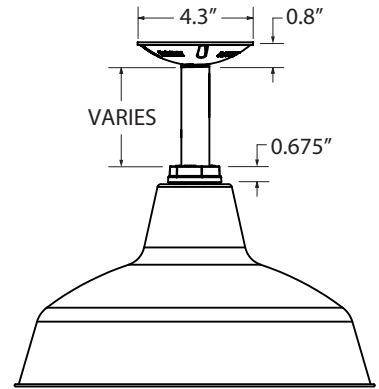

CORD HUNG PENDANT (C)

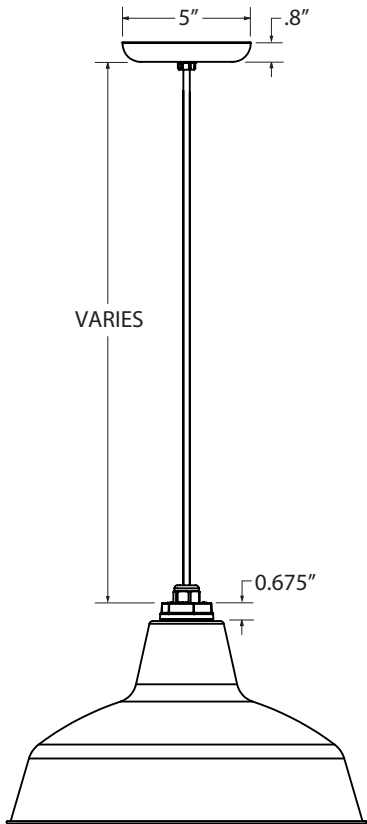


GOOSENECK (G)

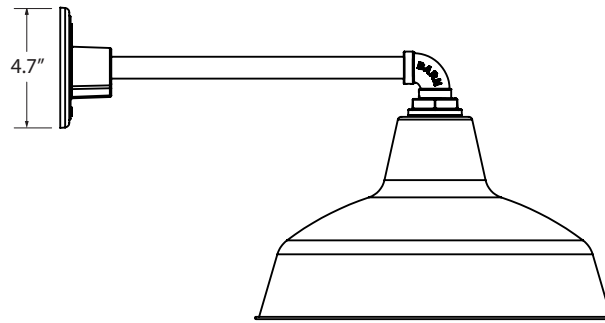

SHOWN WITH: G1 GOOSENECK ARM

LUMINAIRE DIMENSIONS

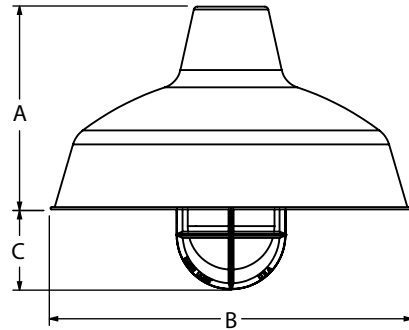

SHOWN WITH: OPTIONAL GUARD & GLASS ACCESSORY

SHADE CODE	HEIGHT (A)	DIAMETER (B)	EXTENSION (C)
WHA8	5.25"	8"	N/A
WHA10	6"	10"	N/A
WHA12	6.75"	12"	3.9"
WHA14	7.75"	14"	3.1"
WHA16	8.50"	16"	2.3"

SPECIFICATIONS

CERTIFICATIONS, LISTINGS & WARRANTY

MADE IN THE USA

Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility
Located in Titusville, FL

CSA LISTED FOR WET LOCATIONS

Includes All Gooseneck, Stem and Flush Mounting Styles
ACR UL Listed for Damp Locations for Gooseneck and Stem
Mounting Styles

CSA LISTED FOR DAMP LOCATIONS

Includes All Chain and Select Cord Hung Mounting Styles
ACR UL Listed for Damp Locations

LIMITED WARRANTY

For Additional Information on Our Limited Warranty, Please See
Our Terms & Conditions

UL CERTIFICATION

UL Listed Fixtures Available upon Request. Please Consult Factory
for Additional Information.

CONSTRUCTION & FINISH

POWDER COAT SHADE

Hand-Spun from High Purity 3003-O Temper Aluminum

PORCELAIN SHADE

Hand-Spun from 20 Gauge Sheet Metal

GALVANIZED SHADE

Spun from High Quality Galvanized Steel

POWDER COAT FINISHES

Polyester Powder Coat Finishes Are Electro-Statically Applied and
Thermocured

PORCELAIN FINISHES

Applied by Hand and Fired in a High Temperature Oven

COPPER

Hand-Spun from High Purity C11000-O60 ETP Copper

BRASS

Hand-Spun from High Purity C2600-O60 Brass

STEM

1/2" Nominal (0.84" Actual) or 3/4" Nominal (1.05" Actual) Sch 40,
6063 Aluminum Mounting Stem. Custom Lengths Available upon
Request.

GOOSENECK

1/2" Nominal (0.84" Actual) or 3/4" Nominal (1.05" Actual) Sch 40,
6063 Aluminum Gooseneck

CORD

Cord Hung Pendants Include 7', 12' or 20' of Cord, Max Cord Length
for GU24 is 12FT (Overall Cord Length is Measured from Base of
Socket and Varies Based on Fixture)

CHAIN

4-Gauge Chain Complete with Quick Link for On-Site Adjustments
to Chain's Length

LIGHT SOURCE

INCANDESCENT

Medium Base E26 Socket, 120 VAC, 200 Watt Max

COMPACT FLUORESCENT

Bi-Pin Base GU24 Socket, 120 VAC, 23 Watt Max