


MOUNTING DIMENSIONS

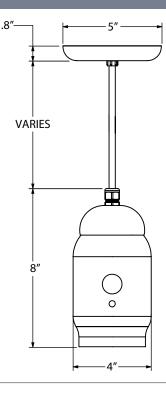

BARN LIGHT ELECTRIC CO.

SPECIFICATIONS	
CERTIFICATIONS, LISTINGS & WARRANTY	LIGHT SOURCE
MADE IN THE USA Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility Located in Titusville, FL CSA LISTED FOR DAMP LOCATIONS Dependent on Cord Selection	INCANDESCENT Medium Base E26 Socket, 120 VAC, 60W Max COMPACT FLUORESCENT Bi-Pin Base GU24 Socket, 120 VAC, 18W Max
LIMITED WARRANTY For Additional Information on Our Limited Warranty, Please See Our Terms & Conditions	
CONSTRUCTION & FINISH	
CANOPY Hand-Spun From High Purity 3003-O Temper Aluminum	
CORD Cord Hung Pendants Include 7', 12' or 20' of Cord, Max Cord Length for GU24 is 12FT (Overall Cord Length is Measured from Base of Socket and Varies Based on Fixture)	
PORCELAIN FINISHES Applied by Hand and Fired in a High Temperature Oven	
POWDER COAT FINISHES Polyester Powder Coat Finishes Are Electro-Statically Applied and Thermocured on the Canopy	